Modular Cooking Line

EVO900 Gas Pasta Cooker, 1 Well, 40 litres



392410 (Z9OOCSBAMC)
40-lt gas pasta cooker with 1 well, (Watermark & AGA) - Australia

Main Features

- 40 liters water basin.
- All major compartments located in front of unit for ease of maintenance.
- Automatic low-water level shut-off: no accidental over-heating.
- Automatic starch removal function during cooking: improved water quality over time.
- Provided with integrated drip zone on which baskets can be placed for draining purposes.
- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Thermocouple device for added safety.
- Easy-to-use control panel with gas cock and piezo ignition.
- Continuous water filling regulated through a manual water tap.
- Large drain with manual ball-valve for fast emptying of well.
- High efficiency 16.5 kW burners in stainless steel with flame failure device and power settings for each well, located below the well.
- [b]Automatic lifting system[/b] (optional accessory): 200mm wide unit with three stainless steel basket supports, holding one GN 1/3 basket each, to be placed on either or both sides of machine to provide automatic lifting for six small portion baskets (t

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Water basin is seamlessly welded into the top of the appliance.
- Water basin in 316-L type Stainless steel.
- One piece pressed 2 mm work top in Stainless steel.

The company reserves the right to make modifications to the products without prior notice. All information is correct at the time of printing.

A focus on sustainability

Sustainability

- [b]EnergyControl[/b]: unique feature for fine power adjustment to control boiling level and optimize energy consumption.
- [b]ESD[/b] available as accessory (installed separately): energy saving device uses heat produced by water drained through the overflow to pre-heat tap-in water up to 60°C, for constant water boiling.

Certifications & Recognitions


Product assessed by the manufacturer and deemed to meet EU safety, health, and environmental protection requirements.

Technical specifications


Gas	
Gas Power:	16.5 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG;Natural Gas
Gas Inlet:	1/2"
Water:	
Drain "D":	1"
Incoming Cold/hot Water line size:	3/4"
Key Information:	
Usable well dimensions (width):	300 mm
Usable well dimensions (height):	260 mm
Usable well dimensions (depth):	520 mm
Well Capacity (MAX):	40 lt MAX
Net weight:	62 kg
Shipping weight (gross):	57 kg
Shipping height:	1080 mm
Shipping width:	460 mm
Shipping depth:	1020 mm
Shipping volume:	0.51 m³

Installation drawings


Front

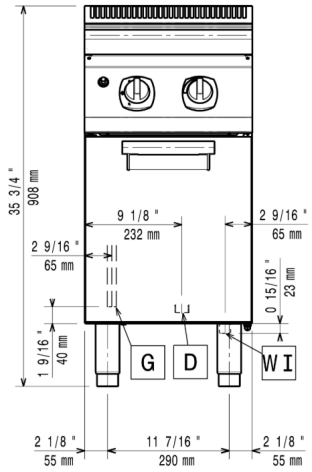


Side

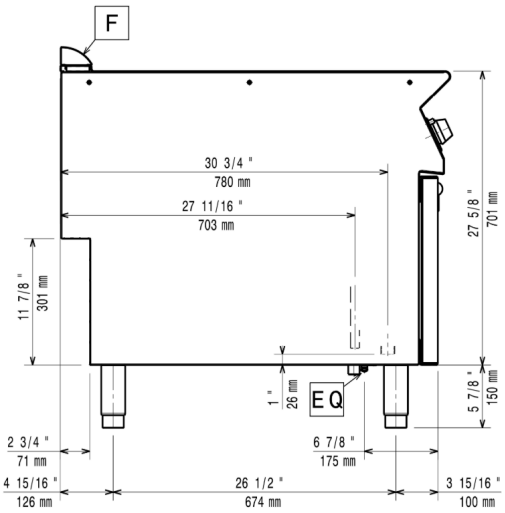

Top

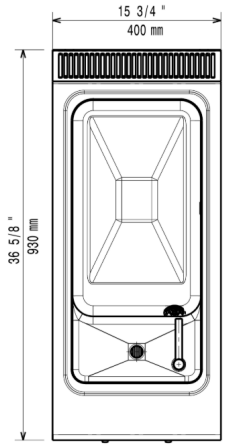

Distances

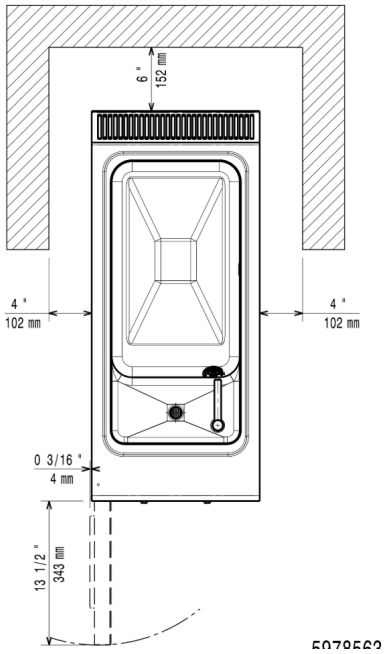

D = Drain
EQ = Equipotential screw

G = Gas connection
DO = Overflow drain pipe

The company reserves the right to make modifications to the products without prior notice. All information is correct at the time of printing.

Accessories

Included Accessories

PNC Code	Description	Quantity
206342	Door for open base cupboard	1

Optional Accessories

PNC Code	Description
Bases & base accessories	
206342	Door for open base cupboard
Baskets	
206233	Set of ergonomic baskets for 40lt pasta cookers
206237	1 ergonomic basket for 40lt pasta cooker
206238	False bottom for 40lt pasta cooker square baskets
206355	Automatic programmable basket lifting system for 40lt pasta cookers, 3 lifters
206395	Frame for 2 pasta cooker basker (900)
206433	2 square baskets, left and right for 40lt pasta cooker
927210	3x1/3GN baskets for 40lt pasta cookers
927211	2x1/2GN baskets for 40lt pasta cookers
927212	3 round baskets diam. 181 mm for 40lt pasta cookers (927219 must be ordered together)
927213	6 round baskets for 40lt pasta cookers (927219 must be ordered together)
927216	1x1/1GN basket for 40lt pasta cookers
927219	Grid support for 40lt pasta cooker round baskets
960644	Upper support frame to hold 6 round baskets for 40lt pasta cookers (alternative to 927219 for 6 round baskets)
Chimney upstands	
206126	Draught diverter, 120 mm diameter
206127	Matching ring for flue condenser, 120 -130 mm diameter
206303	Chimney upstand, 400 mm
206310	Flue condenser for 1/2 module, 120 mm diameter
206400	Chimney grid net, 400mm
Feet, wheels and ramps	
206135	4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.
206136	Flanged feet kit
206210	4 feet for concrete installation (not for 900 line freestanding grill)
206372	Base support for feet/wheels (lateral) for 23lt fryers and pastacookers and refrigerated bases (900)

The company reserves the right to make modifications to the products without prior notice. All information is correct at the time of printing.

Accessories

PNC Code	Description
Handrails	
206165	Side handrail for right/left hand
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206308	Back handrail 800 mm
206309	BACK HANDRAIL 1200 MM
Installation solutions	
206086	Junction sealing kit
Kicking strips	
206147	Frontal kicking strip for concrete installation, 400 mm
206148	Frontal kicking strip for concrete installation, 800 mm
206150	Frontal kicking strip for concrete installation, 1000 mm
206151	Frontal kicking strip for concrete installation, 1200 mm
206152	Frontal kicking strip for concrete installation, 1600 mm
206157	Pair of side kicking strips for concrete installation
206175	Frontal kicking strip, 400 mm
206176	Frontal kicking strip, 800 mm
206177	Frontal kicking strip, 1000 mm
206178	Frontal kicking strip, 1200 mm
206179	Frontal kicking strip, 1600 mm
206180	Pair of side kicking strips
Lids	
206190	Lid and lid holder for 40lt pasta cookers
Other accessories	
206344	Energy saving device for pasta cookers
927225	Pressure regulator for gas units
Panels	
206181	2 panels for service duct (single installation)
206202	2 panels for service duct (back to back installation)
206374	Rear paneling - 800mm (EVO700/900)
206375	Rear paneling - 1000mm (EVO700/900)
206376	Rear paneling - 1200mm (EVO700/900)
Other accessories	
206335	2 side covering panels, height 700 mm, depth 900 mm

The company reserves the right to make modifications to the products without prior notice. All information is correct at the time of printing.